




HYPERLINE

Contalı Sızdırmaz Sürme Seri

Innovative Sliding Series / Раздвижная система / للسحاب ختم بجوان


Kom 1801 / ١٨٠١

Contalı Sürme Kasa Profili Ağırılık : 2200 gr/mt
 Sliding Frame Profile Weight : 2200 gr/mt
 Раздвижная Рама Вес : 2200 гр/м
 بروفیل الإطار للسحاب بجوان الوزن : ٢٢٠٠ غ / م

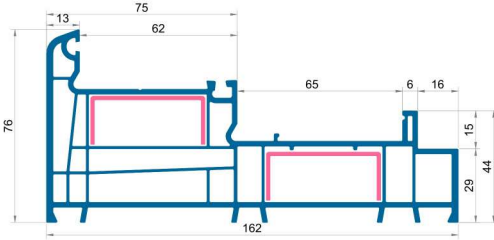


Kom 1804 / ١٨٠٤

Contalı Sürme Kanat Profili Ağırılık : 1570 gr/mt
 Sliding Sash Profile Weight : 1570 gr/mt
 Створка Раздвижной Вес : 1570 гр/м
 بروفیل ضلقة للسحاب بجوان الوزن : ١٥٧٠ غ / م




Kom 1803 / ١٨٠٣

Contalı Sürme Ortakayıt Profili Ağırılık : 1325 gr/mt
 Sliding Mullion Profile Weight : 1325 gr/mt
 Импорт Раздвижной Вес : 1325 гр/м
 بروفیل تی للسحاب بجوان الوزن : ١٣٢٥ غ / م




Kasa - Kanat Uygulaması

Frame - Sash, cross - section / Применение рама-створка / تطبيق الإطار مع الضلقة

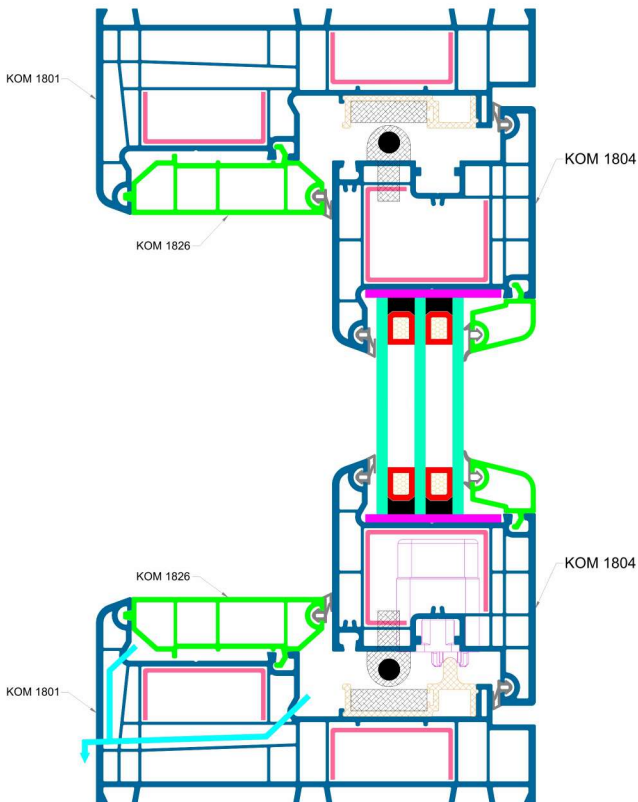


Kasa - Kanat Uygulaması

Frame - Sash, cross - section / Применение рама-створка / تطبيق الإطار مع الضلعة

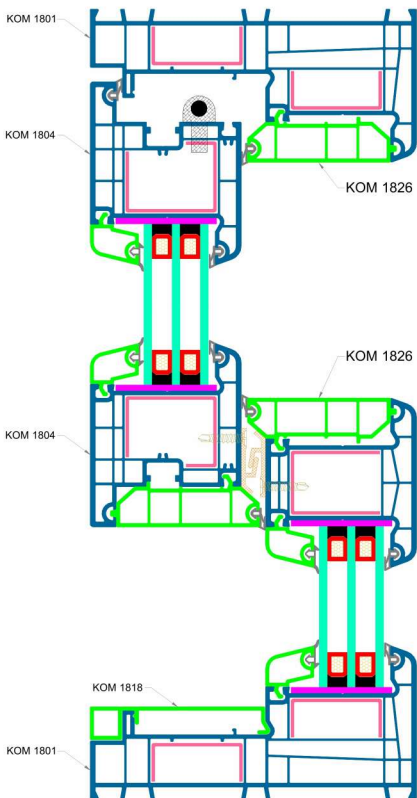


Çıtalar - Glazing Beads - Штапики - مثبت الزجاج



Ком 1808 / 1808

24 mm. Çift Cam Çıtası	Ağırlık : 260 gr/m.
Double Glazing bead for 24mm.	Weight : 260 gr/m.
Штапик 24 мм стеклопакета	Вес : 260 гр/м
مثبت الزجاج للزجاج المزدوج 24 ملم	الوزن : 260 غ / م



Ком 1809 / 1809



32 mm. Cam Çıtası	Ağırlık : 220 gr/mt
Double Glazing bead for 32 mm.	Weight : 220 gr/mt
Штапик 32 мм стеклопакета	Вес : 220 гр/м
مثبت الزجاج للزجاج المزدوج 32 ملم	الوزن : 220 غ / م




Ком 1810 / 1810

Denge Çıtası	Ağırlık : 76 gr/mt
Adjustment Bead	Weight : 76 gr/mt
Штапик	Вес : 76 гр/м
شريط التوازن	الوزن : 76 غ / م


Destek Sacı - Reinforcement profile - Усилитель - حديد التسليح




Kalınlık Thickness	Ağırlık Weight	Ix	Iy
1.20 mm	1044 g/m	0.94 cm ⁴	3.64 cm ⁴
1.50 mm	1296 g/m	1.13 cm ⁴	4.44 cm ⁴
2.00 mm	1700 g/m	1.41 cm ⁴	5.68 cm ⁴




Kalınlık Thickness	Ağırlık Weight	Ix	Iy
1.20 mm	690 g/m	0.33 cm ⁴	2.94 cm ⁴
1.50 mm	856 g/m	0.40 cm ⁴	3.60 cm ⁴
2.00 mm	1130 g/m	0.51 cm ⁴	4.64 cm ⁴



Kalınlık Thickness	Ağırlık Weight	Ix	Iy
1.20 mm	1044 g/m	2.33 cm ⁴	4.76 cm ⁴
1.50 mm	1296 g/m	2.84 cm ⁴	5.84 cm ⁴
2.00 mm	1700 g/m	3.64 cm ⁴	7.54 cm ⁴



Kalınlık Thickness	Ağırlık Weight	Ix	Iy
1.20 mm	1245 g/m	2.90 cm ⁴	4.81 cm ⁴
1.50 mm	1548 g/m	3.53 cm ⁴	5.89 cm ⁴
2.00 mm	2037 g/m	4.51 cm ⁴	7.57 cm ⁴



Kalınlık Thickness	Ağırlık Weight	Ix	Iy
1.20 mm	1010 g/m	2.66 cm ⁴	2.89 cm ⁴
1.50 mm	1252 g/m	3.25 cm ⁴	3.57 cm ⁴
2.00 mm	1656 g/m	4.17 cm ⁴	4.67 cm ⁴