


# KOM 800

## FormLine / Sürme Seri

Sliding Series / Раздвижная система / للسحاب


### Kom 801 / ٨٠١ كوم

Sürme Kasa Profili (Çift Raylı)	Ağırlık : 1110 gr/m.
Sliding Frame Profile (double rail)	Weight : 1110 gr/m.
Раздвижной рамный профиль (двухрельсовый)	Вес : 1110gr/m
بروفيل الإطار للسحاب (بسكتين)	الوزن : ١١١٠ غ / م




### Kom 816 / ٨١٦ كوم

Sürme Pervazlı Kasa	Ağırlık : 1350 gr/mt
Sliding Frame with Cornice	Weight : 1350 gr/mt
Раздвижной рама с откосом	Вес : 1350 gr/m
بروفيل الإطار بكشف للسحاب (بسكتين)	الوزن : ١٣٥٠ غ / م




### Kom 804 / ٨٠٤ كوم

Sürme Kanat Profili	Ağırlık : 1240 gr/m.
Sliding Sash Profile	Weight : 1240 gr/m.
Раздвижной профиль створка	Вес : 1240 гр/м
بروفيل الضلفة للسحاب	الوزن : ١٢٤٠ غ / م




### Kom 824 / ٨٢٤ كوم

Üç Raylı Sürme Kasa Profili	Ağırlık : 1820 gr/mt
Sliding Frame (Triple Rail)	Weight : 1820 gr/mt
Трёхрельсовый Раздвижной Рамный Профиль	Вес : 1820 гр/м
بروفيل الإطار للسحاب بثلاثة سلك	الوزن : ١٨٢٠ غ / م

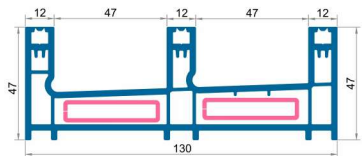


## Kom 821 / ٨٢١ كوم

Sineklikli Sürme Pervazlı Kasa	Ağırlık : 1780 gr/mt
Sliding Frame (Double Rail + Flyscreen Rail)	Weight : 1780 gr/mt
Раздвижной Москитной Рамный	Вес : 1780 гр/м
Профиль с Откосом (Двухрельсовый)	
بروفيل اللطار يكشف و المنخل للسحاب	الوزن : م / غ ١٧٨٠




## Kom 822 / ٨٢٢ كوم

Sürme Kutu Orta Kayıt Profili	Ağırlık : 1200 gr/m.
Sliding box mullion profile	Weight : 1200 gr/m.
Импост раздвижного профиля	Вес : 1200 гр/м
بروفيل تي للسحاب	الوزن : م / غ ١٢٠٠




## Kom 802 / ٨٠٢ كوم

Sürme Fix Kasa Profili (Tek ray)	Ağırlık : 1480 gr/m.
Sliding Fix Frame (mono rail)	Weight : 1480 gr/m.
Рамный раздвижной профиль фикс (однорельсовый)	Вес : 1480 гр/м
بروفيل الإطار الثابت للسحاب (سكة واحدة)	الوزن : م / غ ١٤٨٠



## Kom 815 / ٨١٥ كوم

Sürme Kapı Kanadı	Ağırlık : 1445 gr/m.
Sliding Door Sash	Weight : 1445 gr/m.
Раздвижной Профиль Дверной Створки	Вес : 1445 гр/м
ضلفة الباب للسحاب	الوزن : م / غ ١٤٤٥



## Kom 823 / ٨٢٣ كوم

Sürme Tek Ray Kasa Profili

Sliding Frame (Mono Rail)

Раздвижной рамный профиль с откосом


بروفيل الأطار للسحاب بمسكة واحدة بكشف

Ağırlık : 1720 gr/mt

Weight : 1720 gr/m

Вес : 1720 гр/м

الوزن : ١٧٢٠ غ / م



## Kom 803 / ٨٠٣ كوم

Sürme Fix Ortakayıt Profili

Sliding Fix Mullion Profile

Импост раздвижной профиль фикс


بروفيل تي ثابت للسحاب

Ağırlık : 1630 gr/mt

Weight : 1630 gr/m

Вес : 1630 гр/м

الوزن : ١٦٣٠ غ / م



## Kom 811 / ٨١١ كوم

Sürme Sineklikli Kasa (Çift Ray)

Sliding Frame (Double Rail + Flyscreen Rail)

Раздвижной Москитный Рамный

Профиль (Двухрельсовый)


الاطار بمنخل للسحاب (بمستكين)

Ağırlık : 1520 gr/m

Weight : 1520 gr/m

Вес : 1520 гр/м

الوزن : ١٥٢٠ غ / م



## Kom 827 / ٨٢٧ كوم

Geniş Sineklikli Çift Ray Sürme Kasa

Sliding Frame (Double Rail + Flyscreen Rail)

Раздвижной Москитный Рамный

Профиль с Откосом (Двухрельсовый)


بروفيل الإطار بكشف و المنخل للسحاب


Ağırlık : 1870 gr/mt

Weight : 1870 gr/m

Вес : 1870 гр/м

الوزن : ١٨٧٠ غ / م





### كوم 505 / 5.5

Tek Cam Çıtası	Ağırlık : 180 gr/mt
Single Glazing Bead	Weight : 180 gr/mt
Штапик одинарного стекла	Bec : 180 rp/m
مثبت الزجاج للزجاج الواحد	الوزن : 180 غ / م



### كوم 506 / (5.6)

32 mm. Cam Çıtası	Ağırlık : 170 gr/mt
Glazing bead for 32 mm.	Weight : 170 gr/mt
Штапик 32 мм стеклопакета	Bec : 170 rp/m
مثبت الزجاج للزجاج المزدوج 32 ملم	الوزن : 170 غ / م




### كوم 512 / 5.12

24 mm. Çift Cam Çıtası	Ağırlık : 140 gr/mt
Double Glazing bead for 24mm.	Weight : 140 gr/mt
Штапик 24 мм стеклопакета	Bec : 140rp/m
مثبت الزجاج للزجاج المزدوج 24ملم	الوزن : 140 غ / م


## Kom 812 / ( ٨١٢ ) كوم

Sineklik Kasa	Ağırlık : 240 gr/mt
Fly Screen Frame	Weight : 240 gr/mt
Рама москитной сетки	Вес : 240 гр/м
اطار المنخل	: م / غ ٢٤٠




## Kom 813 / ( ٨١٣ ) كوم

Sineklik Kanat	Ağırlık : 495 gr/mt
Fly Screen Sash	Weight : 495 gr/mt
Створка москитной сетки	Вес : 495 гр/м
ضلفة المنخل	: م / غ ٤٩٥




## Kom 825 / ( ٨٢٥ ) كوم

Sineklik Geniş Kanat	Ağırlık : 680 gr/mt
Fly screen large sash	Weight : 680 gr/mt
Москитная створка	Вес : 680 гр/м
ضلفة منخل السحاب الواسع	: م / غ ٦٨٠



## Kom 814 / ( ٨١٤ ) كوم

Sineklik Ortakayıt	Ağırlık : 390 gr/mt
Fly Screen Mullion	Weight : 390 gr/mt
Импост москитной сетки	Вес : 390 гр/м
تی المنخل	: م / غ ٣٩٠



## Destek Sacı - Reinforcement profile - Усилитель - حديد التسليح

### Kom 825





### Kom 814 - 813




## Kasa - Kanat Uygulaması

Frame - Sash, cross - section / Применение рама-створка / تطبيق الإطار مع الضلقة

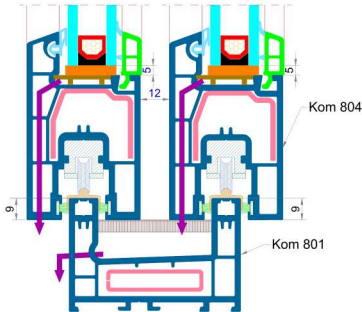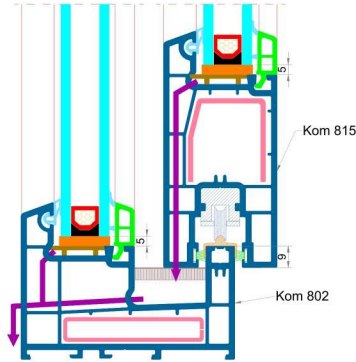

## Kasa - Kanat Uygulaması


Frame - Sash, cross - section / Применение рама-створка / تطبيق الإطار مع الضلقة

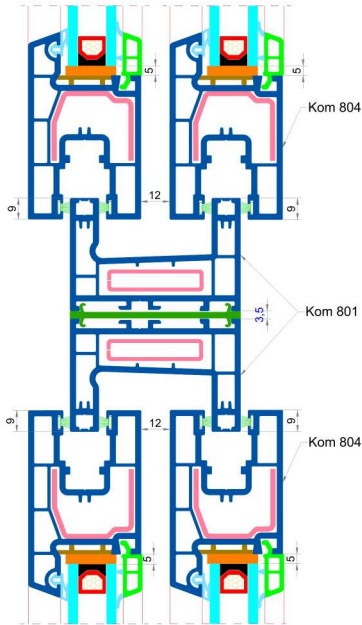





## Kasa - Kanat Uygulaması

Frame - Sash, cross - section / Применение рама-створка / تطبيق الإطار مع الضلعة

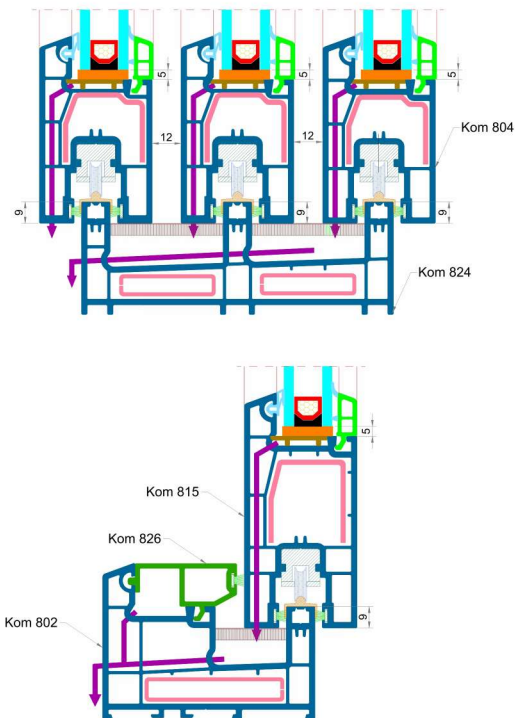



## Kasa - Kanat Uygulaması

Frame - Sash, cross - section / Применение рама-створка / تطبيق الإطار مع الضلعة


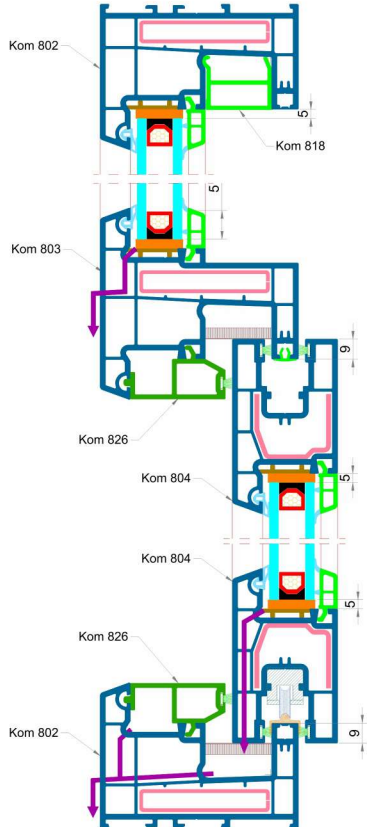
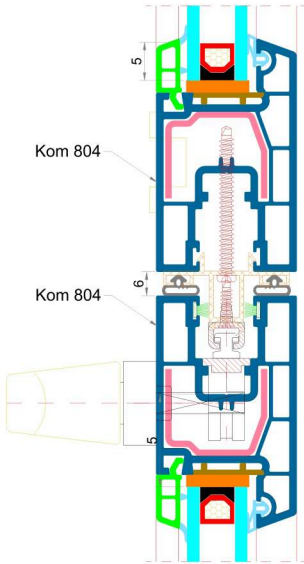


## Sürme Sineklik Uygulaması


Sliding fly screen cross-section / Применение Москитного Профиля  
Раздвижных Систем / تطبيق منخل السحاب

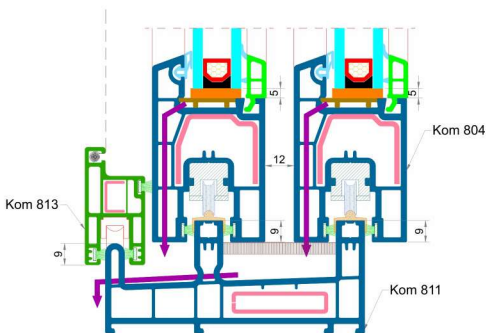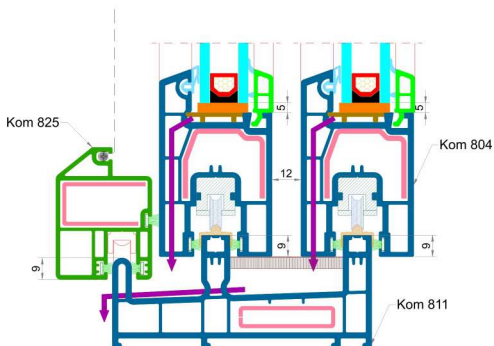

Kom 801 çift ray sürmede fonksiyonel olarak uygulanan bir örnektir  
 Kom 801 Double rail sliding window sample  
 Образец применения функций двухрельсовой раздвижной Kom 801  
 نموذج مميز لتطبيق السكتين في السحاب ٨٠١ كوم

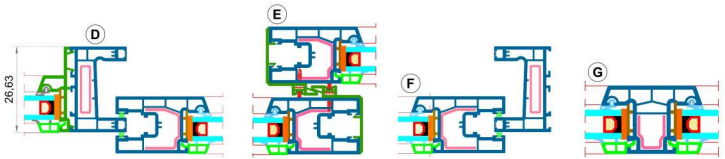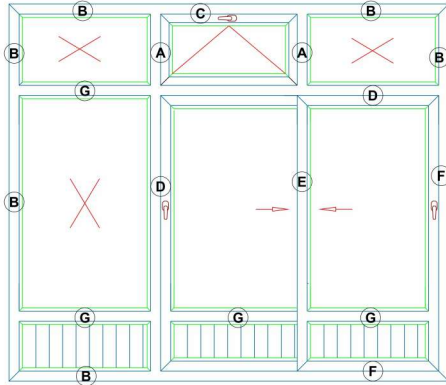


**Kom 503 / ٥٠٣ كوم**  
 Orta Kayıt Profili Ağırlık : 950 gr/m.  
 Mullion Profile Weight : 950 gr/m.  
 Имностр Bec : 950rp/m  
 بروجيل تي الوزن : ٩٥٠ g / م



**Kom 502 / ٥٠٢ كوم**  
 Kanat Profili Ağırlık : 1040 gr/m.  
 Sash Profile Weight : 1040 gr/m.  
 Створка Bec : 1040 rp/m  
 بروجيل الضلعة الوزن : ١٠٤٠ g / م

Destek Sacı - Reinforcement profile - Усилитель - حديد التسليح




KOM
801
811
816
821
824




Kalınlık Thickness	Ağırlık Weight	I <sub>x</sub>	I <sub>y</sub>
1.20 mm	785 g/m	0.15 cm <sup>4</sup>	1.78 cm <sup>4</sup>
1.50 mm	972 g/m	0.17 cm <sup>4</sup>	2.17 cm <sup>4</sup>
2.00 mm	1275 g/m	0.20 cm <sup>4</sup>	2.75 cm <sup>4</sup>

KOM
801
811
816
821
824




Kalınlık Thickness	Ağırlık Weight	I <sub>x</sub>	I <sub>y</sub>
1.20 mm	475 g/m	0.04 cm <sup>4</sup>	1.30 cm <sup>4</sup>
1.50 mm	583 g/m	0.05 cm <sup>4</sup>	1.60 cm <sup>4</sup>
2.00 mm	770 g/m	0.06 cm <sup>4</sup>	2.04 cm <sup>4</sup>

KOM
804




Kalınlık Thickness	Ağırlık Weight	I <sub>x</sub>	I <sub>y</sub>
1.20 mm	690 g/m	0.76 cm <sup>4</sup>	1.74 cm <sup>4</sup>
1.50 mm	860 g/m	0.93 cm <sup>4</sup>	2.12 cm <sup>4</sup>
2.00 mm	1130 g/m	1.20 cm <sup>4</sup>	2.73 cm <sup>4</sup>

KOM
815



Kalınlık Thickness	Ağırlık Weight	I <sub>x</sub>	I <sub>y</sub>
1.20 mm	810 g/m	1.43 cm <sup>4</sup>	2.02 cm <sup>4</sup>
1.50 mm	1000 g/m	1.77 cm <sup>4</sup>	2.47 cm <sup>4</sup>
2.00 mm	1340 g/m	2.30 cm <sup>4</sup>	3.18 cm <sup>4</sup>

Destek Sacı - Reinforcement profile - Усилитель - حديد التسليح




KOM  
802  
803  
823



Kalınlık Thickness	Ağırlık Weight	Ix	Iy
1.20 mm	1100 g/m	0.21 cm <sup>4</sup>	4.94 cm <sup>4</sup>
1.50 mm	1360 g/m	0.25 cm <sup>4</sup>	6.11 cm <sup>4</sup>
2.00 mm	1800 g/m	0.29 cm <sup>4</sup>	7.85 cm <sup>4</sup>

KOM  
802  
803  
823




Kalınlık Thickness	Ağırlık Weight	Ix	Iy
1.20 mm	630 g/m	0.04 cm <sup>4</sup>	3.38 cm <sup>4</sup>
1.50 mm	780 g/m	0.05 cm <sup>4</sup>	4.16 cm <sup>4</sup>
2.00 mm	1030 g/m	0.06 cm <sup>4</sup>	5.37 cm <sup>4</sup>

KOM  
822



Kalınlık Thickness	Ağırlık Weight	Ix	Iy
1.20 mm	1100 g/m	1.42 cm <sup>4</sup>	3.92 cm <sup>4</sup>
1.50 mm	1370 g/m	1.72 cm <sup>4</sup>	4.78 cm <sup>4</sup>
2.00 mm	1800 g/m	2.17 cm <sup>4</sup>	6.13 cm <sup>4</sup>

KOM  
822



Kalınlık Thickness	Ağırlık Weight	Ix	Iy
1.20 mm	770 g/m	0.62 cm <sup>4</sup>	3.35 cm <sup>4</sup>
1.50 mm	960 g/m	0.77 cm <sup>4</sup>	4.10 cm <sup>4</sup>
2.00 mm	1260 g/m	0.99 cm <sup>4</sup>	5.30 cm <sup>4</sup>